

Salad & Sandwich Prep Table - Drawer



GSU-28(8)-D2



GSU-36(10)-D4



GSU-48(12)-D4



GSU60-(16)-D4



GSU-72(18)-D6



GSU-72(18)-D4RM



GSU-72(18)-D4LM



GSU-72(18)-D4RL

Features & Benefits

System

- Digital temperature control & monitor
- Hot gas condensate system
- Automatic evaporation & defrost system
- 70-degree-open and insulated stainless steel covers eliminate heat transfer and protect products when closed
- Locking the dispenser bar locks the pan in place to prevent product spills

Temperature

- Enhanced Airflow Holds Product Temperature 32°F~41°F (0°C~5°C)

Components

- Accommodate 6" deep pans (pans are optional)
- Compact size (344mm) and reversible cutting board is easily removed for cleaning or additional use
- PVC coated sturdy wire shelves
- 4" heavy duty casters with brakes standard

Strong & Durable Cabinet Finish

- Stainless steel finished top, front, sides and doors
- Galvanized steel finished back and bottom

User Friendly Feature


- Auto-closing doors
- Sturdy and easy-grip handles and doors that open effortlessly
- Magnetic door gasket provides an easy-to-remove feature for cleaning or replacement feature

Options

- Drawer mixed model available
- Leg models available

Slight Variations May Exist

Plan View

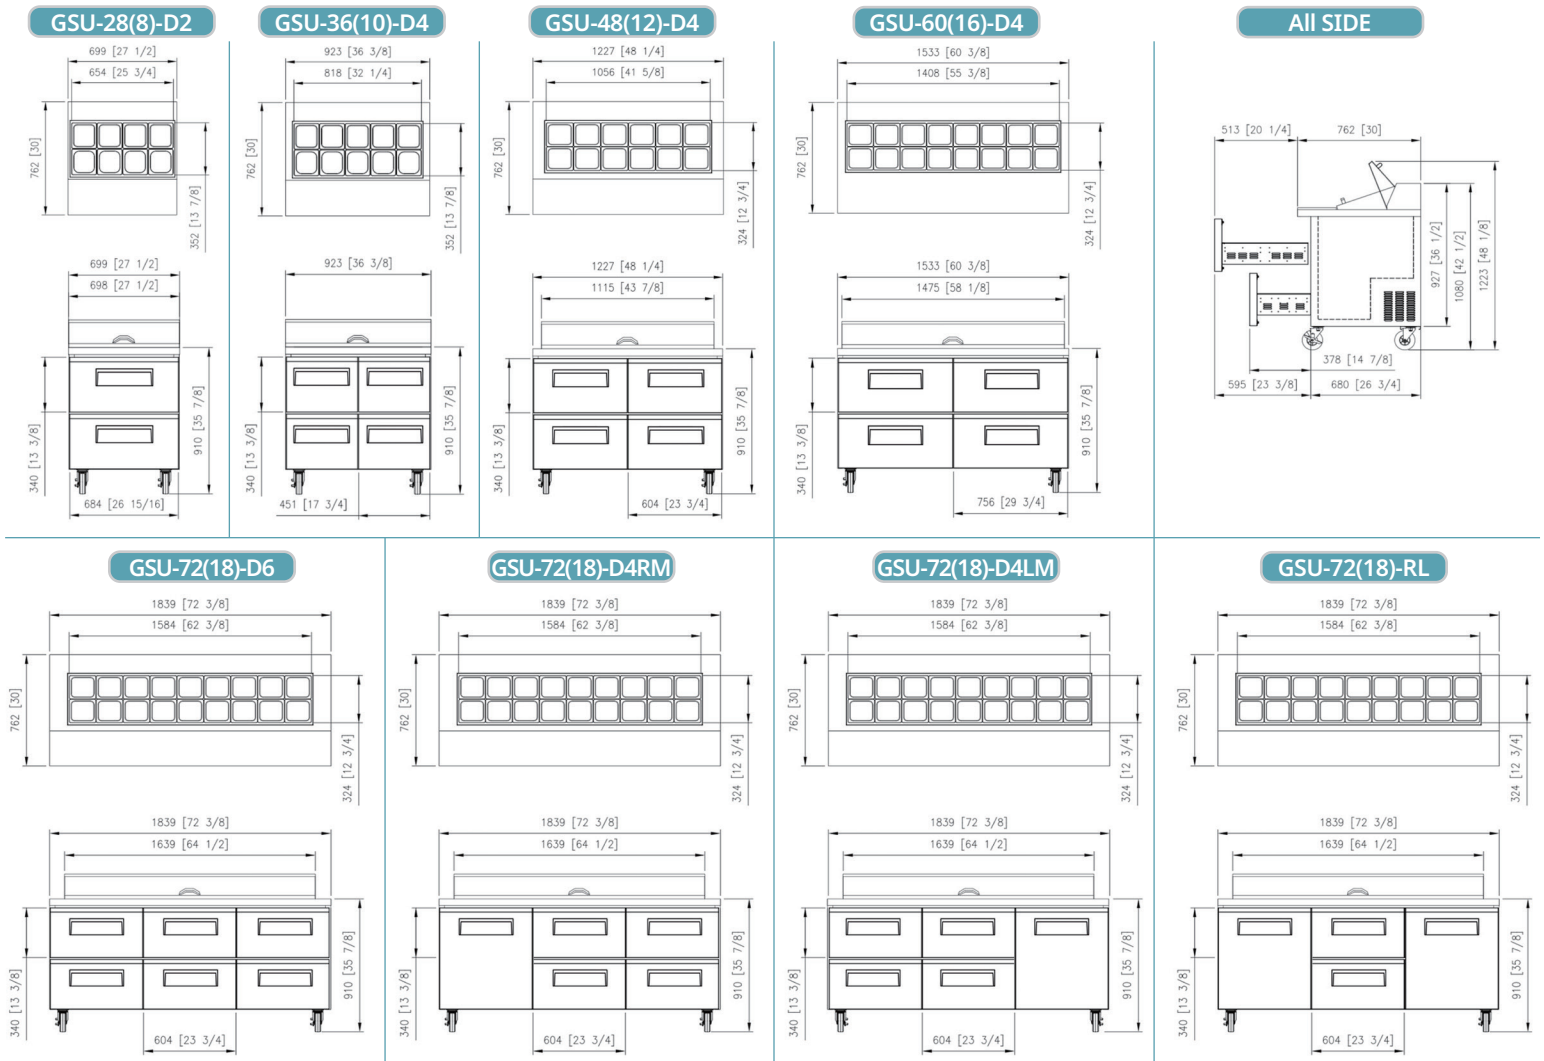

Specifications

Model	Capacity (cu.ft/ ℓ)	Exterior Dimension (Inch/mm)			Net Weight (lb/kg)	Gross Weight (lb/kg)	Amps	Voltage (V/Hz/∅)	HP	Refrigerant	No. Drawers	No. Pans (1/6")
		W	D	H								
GSU-28 (8)-D2	6.55	27 1/2	30	42 1/2	187	196	3.4	115/60/1	1/5	R -290	2	8
	186	699	762	1,080	85	89	2.0	220/50,60/1				
GSU-36 (10)-D4	8.92	36 3/8	30	42 1/2	238	251	3.4	115/60/1	1/5	R -290	4	10
	252	923	762	1,080	108	114	2.0	220/50,60/1				
GSU-48 (12)-D4	12.23	48 1/4	30	42 1/2	291	309	6.0	115/60/1	3/8	R -290	4	12
	346	1,227	762	1,080	132	140	3.2	220/50,60/1				
GSU-60 (16)-D4	15.56	60 3/8	30	42 1/2	322	344	6.0	115/60/1	3/8	R -290	4	16
	441	1,533	762	1,080	146	156	3.2	220/50,60/1				
GSU-72 (18)-D6	18.75	72 3/8	30	42 1/2	386	414	6.1	115/60/1	3/8	R -290	6	18
	531	1,839	762	1,080	175	188	3.2	220/50,60/1				
GSU-72 (18)-D4RM	18.75	72 3/8	30	42 1/2	386	414	6.1	115/60/1	3/8	R -290	4	18
	531	1,839	762	1,080	175	188	3.2	220/50,60/1				
GSU-72 (18)-D4LM	18.75	72 3/8	30	42 1/2	386	414	6.1	115/60/1	3/8	R -290	4	18
	531	1,839	762	1,080	175	188	3.2	220/50,60/1				
GSU-72 (18)-D4RL	18.75	72 3/8	30	42 1/2	386	414	6.1	115/60/1	3/8	R -290	4	18
	531	1,839	762	1,080	175	188	3.2	220/50,60/1				

* External dimensions include 5" caster height

GRAND has the right to change specifications without further notice.



Grand Manufacturing LLC
www.grandmfgllc.com

