

## Megatop Sandwich Prep Table - Drawer



GMU-28(12)-D2



GMU-36(15)-D4



GMU-48(18)-D4



GMU-60(24)-D4



GMU-72(30)-D6



GMU-72(30)-D4RM



GMU-72(30)-D4LM



GMU-72(30)-D4RL

## Features & Benefits

### System

- Digital temperature control & monitor
- Hot gas condensate system
- Automatic evaporation & defrost system
- 70-degree-open and insulated stainless steel covers eliminate heat transfer and protect products when closed
- Locking the dispenser bar locks the pan in place to prevent product spills

### Temperature

- Enhanced Airflow Holds Product Temperature 32°F~41°F (0°C~5°C)

### Components

- Accommodate 6" deep pans (pans are optional)
- Compact size (344mm) and reversible cutting board is easily removed for cleaning or additional use
- PVC coated sturdy wire shelves
- 4" heavy duty casters with brakes standard

### Strong & Durable Cabinet Finish

- Stainless steel finished top, front, sides and doors
- Galvanized steel finished back and bottom

### User Friendly Feature


- Auto-closing doors
- Sturdy and easy-grip handles and doors that open effortlessly
- Magnetic door gasket provides an easy-to-remove feature for cleaning or replacement feature

### Options

- Drawer mixed model available
- Leg models available

### Slight Variations May Exist

# Plan View

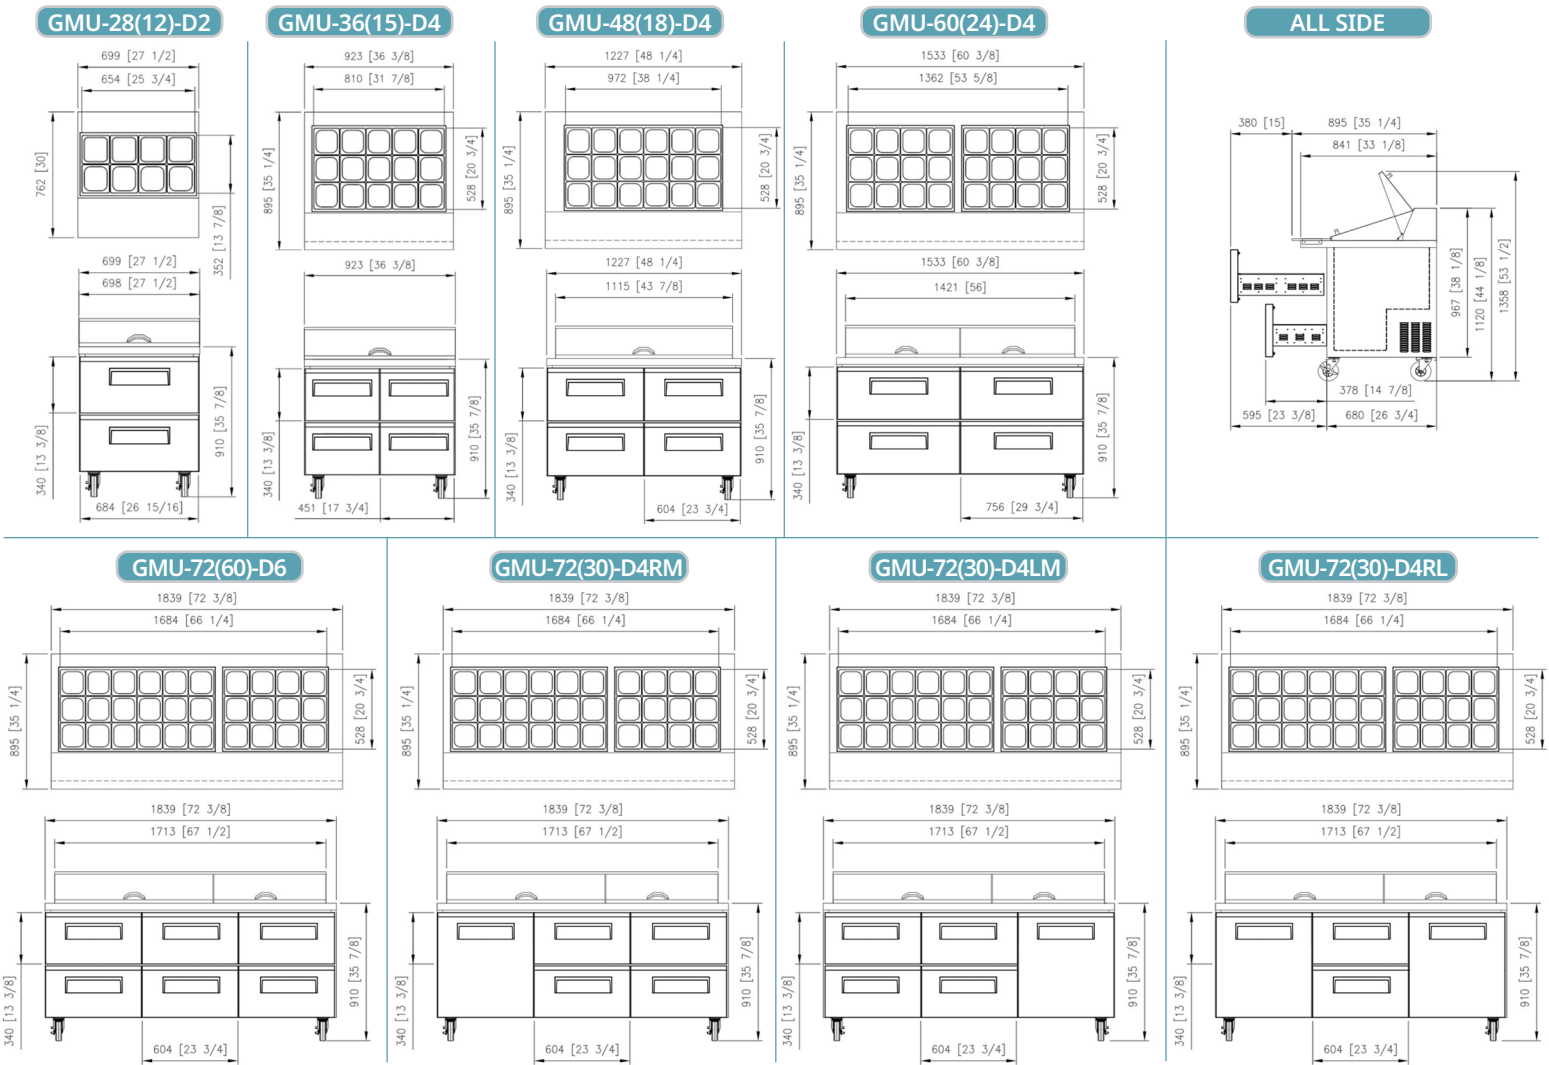

## Specifications

Model	Capacity (cu.ft./ ℓ)	Exterior Dimension (Inch/mm)			Net Weight (lb/kg)	Gross Weight (lb/kg)	Amps	Voltage (V/Hz/Ø)	HP	Refrigerant	No. Drawers	No. Pans (1/6")
		W	D	H								
GMU-28 (12)-D2	6.55	27 1/2	35 1/4	44 1/8	198	207	3.4	115/60/1	1/5	R -290	2	12
	186	699	895	1,120	90	94	2.0	220/50,60/1				
GMU-36 (15)-D4	8.92	36 3/8	35 1/4	44 1/8	251	265	3.4	115/60/1	1/5	R -290	4	15
	252	923	895	1,120	114	120	2.0	220/50,60/1				
GMU-48 (18)-D4	12.23	48 1/4	35 1/4	44 1/8	304	322	6.0	115/60/1	3/8	R -290	4	18
	346	1,227	895	1,120	138	146	3.2	220/50,60/1				
GMU-60 (24)-D4	15.56	60 3/8	35 1/4	44 1/8	344	366	6.0	115/60/1	3/8	R -290	4	24
	441	1,533	895	1,120	156	166	3.2	220/50,60/1				
GMU-72 (30)-D6	18.75	72 3/8	35 1/4	44 1/8	412	441	6.1	115/60/1	3/8	R -290	6	30
	531	1,839	895	1,120	187	200	3.2	220/50,60/1				
GMU-72 (30)-D4RM	18.75	72 3/8	35 1/4	44 1/8	412	441	6.1	115/60/1	3/8	R -290	4	30
	531	1,839	895	1,120	187	200	3.2	220/50,60/1				
GMU-72 (30)-D4LM	18.75	72 3/8	35 1/4	44 1/8	412	441	6.1	115/60/1	3/8	R -290	4	30
	531	1,839	895	1,120	187	200	3.2	220/50,60/1				
GMU-72 (30)-D4RL	18.75	72 3/8	35 1/4	44 1/8	412	441	6.1	115/60/1	3/8	R -290	2	30
	531	1,839	895	1,120	187	200	3.2	220/50,60/1				

\* External dimensions include 5" caster height

GRAND has the right to change specifications without further notice.



Grand Manufacturing LLC  
www.grandmfgllc.net

